

The material receivers of the TMM series, completely made of stainless steel, were designed to be used in centralized feeding systems MATRIX 4.0.

There are 8 models from 2 dm³ to 100dm³.



The material receivers of the TMX series, with a Pyrex-glass body, were designed to be used in centralized feeding systems MATRIX 4.0.

There are 3 models from 4 dm³ to 25dm³.



TECHNICAL CHARACTERISTICS



- Stainless steel structure.
- Hinged cover.
- High-vacuum operation.
- Automatic filter cleaning.
- Flap-type outlet valve and wear-resistant gasket.
- Air vent with door and integrated metal filter.
- ETHERNET connection

ACCESSORIES:

- Pneumatic discharge.
- Proportioning valve.
- It can be integrated with MWS weighing system.

ADDED VALUE:

- Easy to use.
- Easy cleaning and maintenance.
- Safe and reliable.
- Fast installation with a 360° orientation.
- Status indicator.

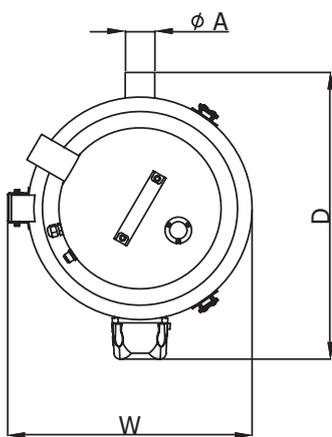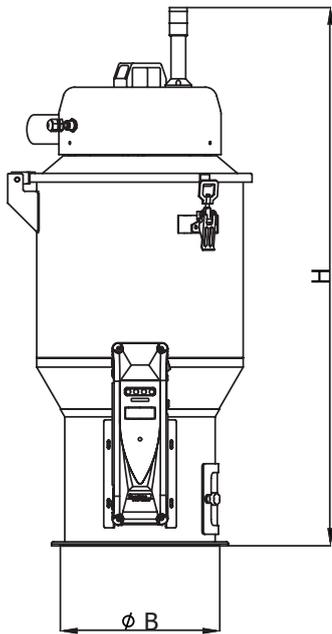

TMM containers



TMX containers

Technical data

| | Unit of measure | TMM2 | TMM4 | TMX4 | TMM5 | TMX8 | TMM10 | TMM25 | TMX25 | TMM50 | TMM100 |
|-----------------------------|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----------|
| Capacity | dm ³ | 2 | 4 | 4 | 5 | 8 | 10 | 25 | 25 | 50 | 100 |
| Centre-to-centre distance B | mm | 210 | 210 | 210 | 280 | 210 | 280 | 280 | 280 | 280 | 280 |
| Material inlet diameter A | mm | 40/50 | 40/50 | 40/50 | 40/50 | 40/50 | 40/50 | 50/60 | 60 | 60/70 | 60/70/90 |
| Dimensions | W | 270 | 270 | 270 | 340 | 270 | 340 | 415 | 355 | 415 | 570 |
| | D | 360 | 360 | 345 | 410 | 345 | 410 | 490 | 440 | 490 | 550 |
| | H | 545 | 625 | 685 | 650 | 810 | 753 | 915 | 965 | 1085 | 1220 |
| Weight | kg | 7 | 8 | 8 | 10 | 11 | 12 | 15 | 15 | 17 | 30 |